


no longer available SIMATIC Panel PC 677B 2x10/100/1000 Mbit/s Ethernet; 4 x USB V2.0, 1x serial (COM1); 15" Key, 1024x 768; USB interface at the front 110/230 V AC power supply with NAMUR, power supply cable Europe; Core 2 Duo T5500, 1.66 GHz; 2 MB SLC, 2 x PCI; 1 GB DDR2 RAM; 160 GB SATA HDD 3.5", DVD +-R +-RW, PROFIBUS/MPI; Windows XP Prof. MUI
(de,en,fr,es,it,ja,zh,ko)

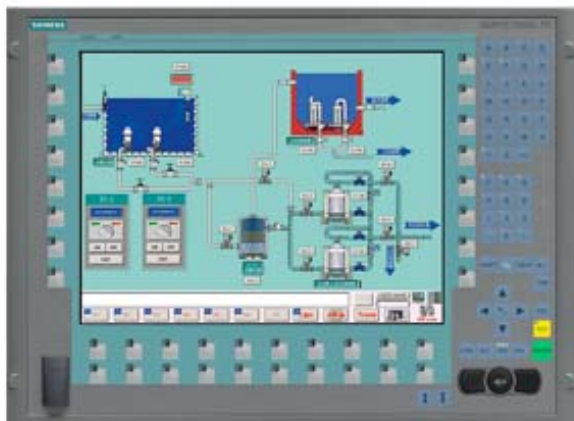

General information	
Product type designation	SIMATIC Panel PC 677B 15" Keyboard
Display	
Design of display	15" TFT
Screen diagonal	15 in
Resolution (pixels)	
• Horizontal image resolution	1 024 Pixel
• Vertical image resolution	768 Pixel
General features	
• Expansion components	Uninterruptible power supply (USP), SIMATIC NET communication modules
Backlighting	
• MTBF backlighting (at 25 °C)	50 000 h
Control elements	
Input device	
• Mouse, at front	Yes
Keyboard fonts	
• Function keys	Yes

— Number of function keys	36
• alphanumeric keyboard	Yes
Touch operation	
• Design as touch screen	No
Installation type/mounting	
central design	Yes
distributed design	Yes; by means of remote kit
maximum permissible installation angle +/-	20°
Supply voltage	
Type of supply voltage	100/240 V AC (autorange) 50/60 Hz; optional 24 V DC
Line frequency	
• Rated value 50 Hz	Yes
• Rated value 60 Hz	Yes
Power loss	
In full configuration	140W max. (15W included per slot)
Processor	
Processor type	Intel Core 2 Duo technology; Intel Celeron M 440, 1.86 GHz, 533 MHz FSB, 1 MB SLC; Core 2 Duo T5500, 1.66 GHz, 667 MHz FSB, 2 MB SLC; Core 2 Duo T7400, 2.16 GHz, 667 MHz FSB, 4 MB SLC
Drives	
Optical drives	Optional: DVD±R±RW combi drive; on rear, can be operated from side
Diskette drive	optional: via external USB floppy disk drive
Hard disk	3.5" SATA hard disk ≥ 160 GB, optional ≥ 250 GB, optional: 2 x 2.5" SATA hard disk module (≥ 80 GB), RAID 1 controller onboard; all drives are vibration-damped
Memory	
Main memory	512 MB to 4 GB
Capacity of main memory, max.	4 096 Mbyte; At least 3.2 GB can be used
Data areas and their retentivity	
Retentive data area (incl. timers, counters, flags), max.	2 MB battery-backed only DC power supply WinAC RTX 2005 SP1 or higher
Hardware configuration	
Slots	
• free slots	2x PCI or 1x PCI & 1x PCIe (x4) (slots with card retainer), 1x slot for CompactFlash Card
• Number of PCI slots	2
• Number of compact flash slots	1
Interfaces	

PROFIBUS/MPI	1
USB port	1x at front, 4x at rear, USB 2.0 (500 mA)
Connection for keyboard/mouse	USB / USB
serial interface	COM1: 1 x V.24 (RS232)
Video interfaces	
• Graphics interface	DVI-I usable for additional display unit (VGA via adapter); color depth 32 bits, 8 to 128 MB Shared Memory
Industrial Ethernet	
• Industrial Ethernet interface	Onboard, 2 x 10/100/1000 Mbit/s, RJ45, no plug-in card necessary
— 100 Mbps	Yes
— 1000 Mbps	Yes
Integrated Functions	
Monitoring functions	
• Temperature monitoring	Yes
• Watchdog	Yes
• Status LEDs	Yes
Degree and class of protection	
IP (at the front)	IP65 or IP66k (15" INOX)
Standards, approvals, certificates	
Approval	CE, cULus (508)
CE mark	Yes
EMC	CE, EN 55011, EN 61000-6-4, EN 61000-6-2
Marine approval	
• Germanischer Lloyd (GL)	No
• American Bureau of Shipping (ABS)	No
• Bureau Veritas (BV)	No
• Det Norske Veritas (DNV)	No
• Lloyds Register of Shipping (LRS)	No
• Polski Rejestr Statkow (PRS)	No
Ambient conditions	
Ambient temperature during operation	
• Ambient temperature during operation	12", 15": +5 °C to +50 °C in maximum configuration 17", 19": +5 °C to +45 °C in maximum configuration
• min.	5 °C
• max.	50 °C
Relative humidity	
• Relative humidity	Tested to DIN IEC 60068-2-3, DIN IEC 60068-2-30, DIN IEC 60068-2-56: 5% to 80% at 25 °C (no condensation)
Vibrations	
• Vibration resistance during operation acc. to IEC 60068-2-6	Tested to DIN IEC 60068-2-6: 10 Hz to 58 Hz: 0.075 mm, 58 Hz to 200 Hz: 9.8 m/s ² (1 g)

Shock testing	
• Shock load during operation	Tested to DIN IEC 60068-2-29: 50 m/s ² (5 g), 30 ms, 100 shocks
Operating systems	
Operating system	Windows 2000 Prof. (Multi-Language), Windows XP Prof. (Multi-Language), Windows Vista Ultimate 32 bit, Windows Server 2003 Standard 32 bit (incl. 5 clients), Windows XP embedded (English) on CF card, opt. without operating system
pre-installed operating system	Yes
Additional info on operating system	Multi-Language: Windows 2000, XP: DE, EN, IT, FR, SP, KOR, CHN (traditional), CHN (simplified), JPN, Windows Vista and Server 2003: DE, EN, IT, FR, SP; further languages downloadable from Microsoft
without operating system	Yes
pre-installed operating system	
• Windows XP Professional	Yes
Software	
SIMATIC Software	Optionally in package with SIMATIC WinCC or WinCC flexible
Accessories	
Accessory components	Slide-in keyboard labels, direct key module, remote kit
Dimensions	
Width of the housing front	310 mm
Height of housing front	482 mm
Overall depth	124 mm
• additional mounting depth (optical drive)	21 mm
Operator control unit (W x H) in mm	483 mm x 355 mm (19", 8 HU)
• Operator panel width	483 mm
• Operator panel height	355 mm
Install. dimensions, centralized design (W x H x D without optical drive) in mm	450 mm x 321 mm x 124 mm
• Width	450 mm
• Height	321 mm
• Depth	124 mm
Install. dimensions, operator panel with distributed design (W x H x D) in mm	450 mm x 321 mm x 89 mm
Install. dimensions, computer unit with distributed design (W x H x D) in mm	298 mm x 301 mm x 100 mm; (298 mm x 301 mm x 80 mm without CD)
Mounting cutout/device depth (W x H x T)	450 mm x 321 mm / 145 mm (incl. optical drive)
Weights	
Panel PC in central design, approx.	16 kg
Other	
Warranty period	24 mo; Warranty period

last modified:

04/06/2018