



Figure similar

MLFB-Ordering data

6SL3210-1NE28-8UL0

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Rated data		General tech. specifications	
Input		Power factor λ	0.90
Number of phases	3 AC	Offset factor $\cos \phi$	0.95
Line voltage	380 ... 480 V ± 10 %	Efficiency η	0.97
Line frequency	47 ... 63 Hz	Sound pressure level (1m)	60 dB
Rated current (LO)	84.00 A	Power loss	1.20 kW
Rated current (HO)	70.00 A	Ambient conditions	
Output		Cooling	Internal air cooling
Number of phases	3 AC	Cooling air requirement	0.080 m ³ /s
Rated voltage	400 V	Installation altitude	1000 m
Rated current (LO)	90.00 A	Ambient temperature	
Rated current (HO)	75.00 A	Operation LO	0 ... 40 °C (32 ... 104 °F)
Max. output current	112.00 A	Operation HO	0 ... 50 °C (32 ... 122 °F)
Rated power IEC 400V (LO)	45.00 kW	Transport	-25 ... 55 °C (-13 ... 131 °F)
Rated power NEC 480V (LO)	60.00 hp	Storage	-25 ... 55 °C (-13 ... 131 °F)
Rated power IEC 400V (HO)	37.00 kW	Relative humidity	
Rated power NEC 480V (HO)	50.00 hp	Max. operation	95 % RH, condensation not permitted
Pulse frequency	4 kHz		
Output frequency for vector control	0 ... 200 Hz		
Output frequency for V/f control	0 ... 550 Hz		

Overload capability

Low Overload (LO)

1.1 x rated output current (i.e. 110 % overload) for 57 s with a cycle time of 300 s 1.5 x rated output current (i.e. 150 % overload) for 3 s with a cycle time of 300 s

High Overload (HO)

1.5 x output current rating (i.e., 150 % overload) for 57 s with a cycle time of 300 s 2 x output current rating (i.e., 200 % overload) for 3 s with a cycle time of 300 s

SIEMENS

Data sheet for SINAMICS Power Module PM230



MLFB-Ordering data


6SL3210-1NE28-8UL0

Mechanical data		Connections	
Degree of protection	IP20	Line side	
Size	FSE	Version	M6 bolt
Net weight	15.00 kg	Conductor cross-section	25.00 ... 50.00 mm²
Width	275.0 mm	Motor end	
Height	499.0 mm	Version	M6 bolt
Depth	204.0 mm	Conductor cross-section	25.00 ... 50.00 mm²

Converter losses to EN 50598-2*	
Efficiency class	IE2

Comparison with the reference converter (90% / 100%)

-66.95 %

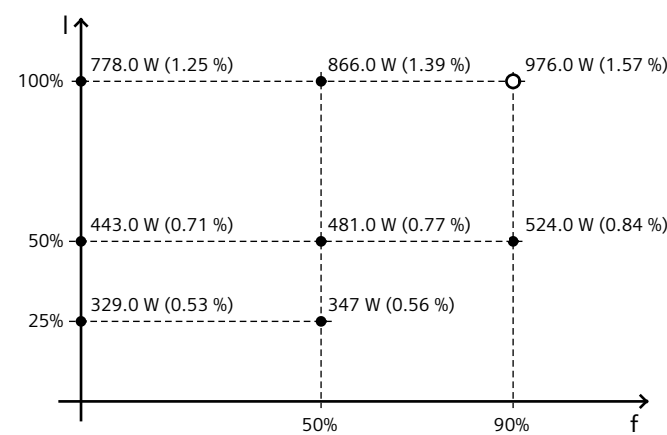

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency(f). The values are valid for the basic version of the converter without options/components.

*converted values

Max. motor cable length	
Shielded	25 m
Unshielded	100 m

Standards	
Compliance with standards	CE
CE marking	Low-voltage directive 2006/95/EC